


HUCK

Product Bulletin

MARKET RELEASE MODELS 6042 & 7042 H.I.T.

Short versions of the IN-LINE HYDRAULIC INSTALLATION TOOLS are available in two sizes as follows:

Fasteners	Installation Tools
C50L-20 M50L-16	6042 and 6042-1
C50L-24	7042 and 7042-1

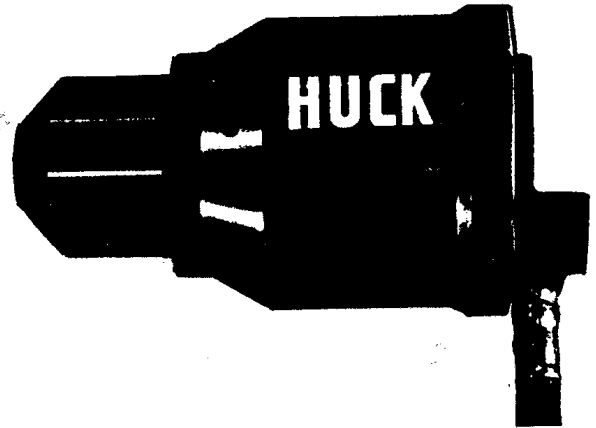


The tools are equipped with hoses, trigger and control cord to connect to the POWERIG[®] hoses and control cord.

The Model 6042-1 is identical to Models 6022 and 6012 except the overall length is 8-1/4 inches. The Model 6042 is 3/8 inch shorter because the horizontal hose ports have been eliminated. The Model 7041-1 is identical to Model 7022 except the overall length is 8-5/8 inches. The Model 7042 is 3/8 inch shorter. The Model 6042 and 6042-1 weigh 16-1/2 pounds. The 7042 and 7042-1 weigh 19-1/2 pounds.

These installation tools require 7000-7400 psi PULL PRESSURE and 2800-3200 psi RETURN PRESSURE as supplied by Huck Hydraulic POWERIGS.

Clearance dimensions are shown on the next page.

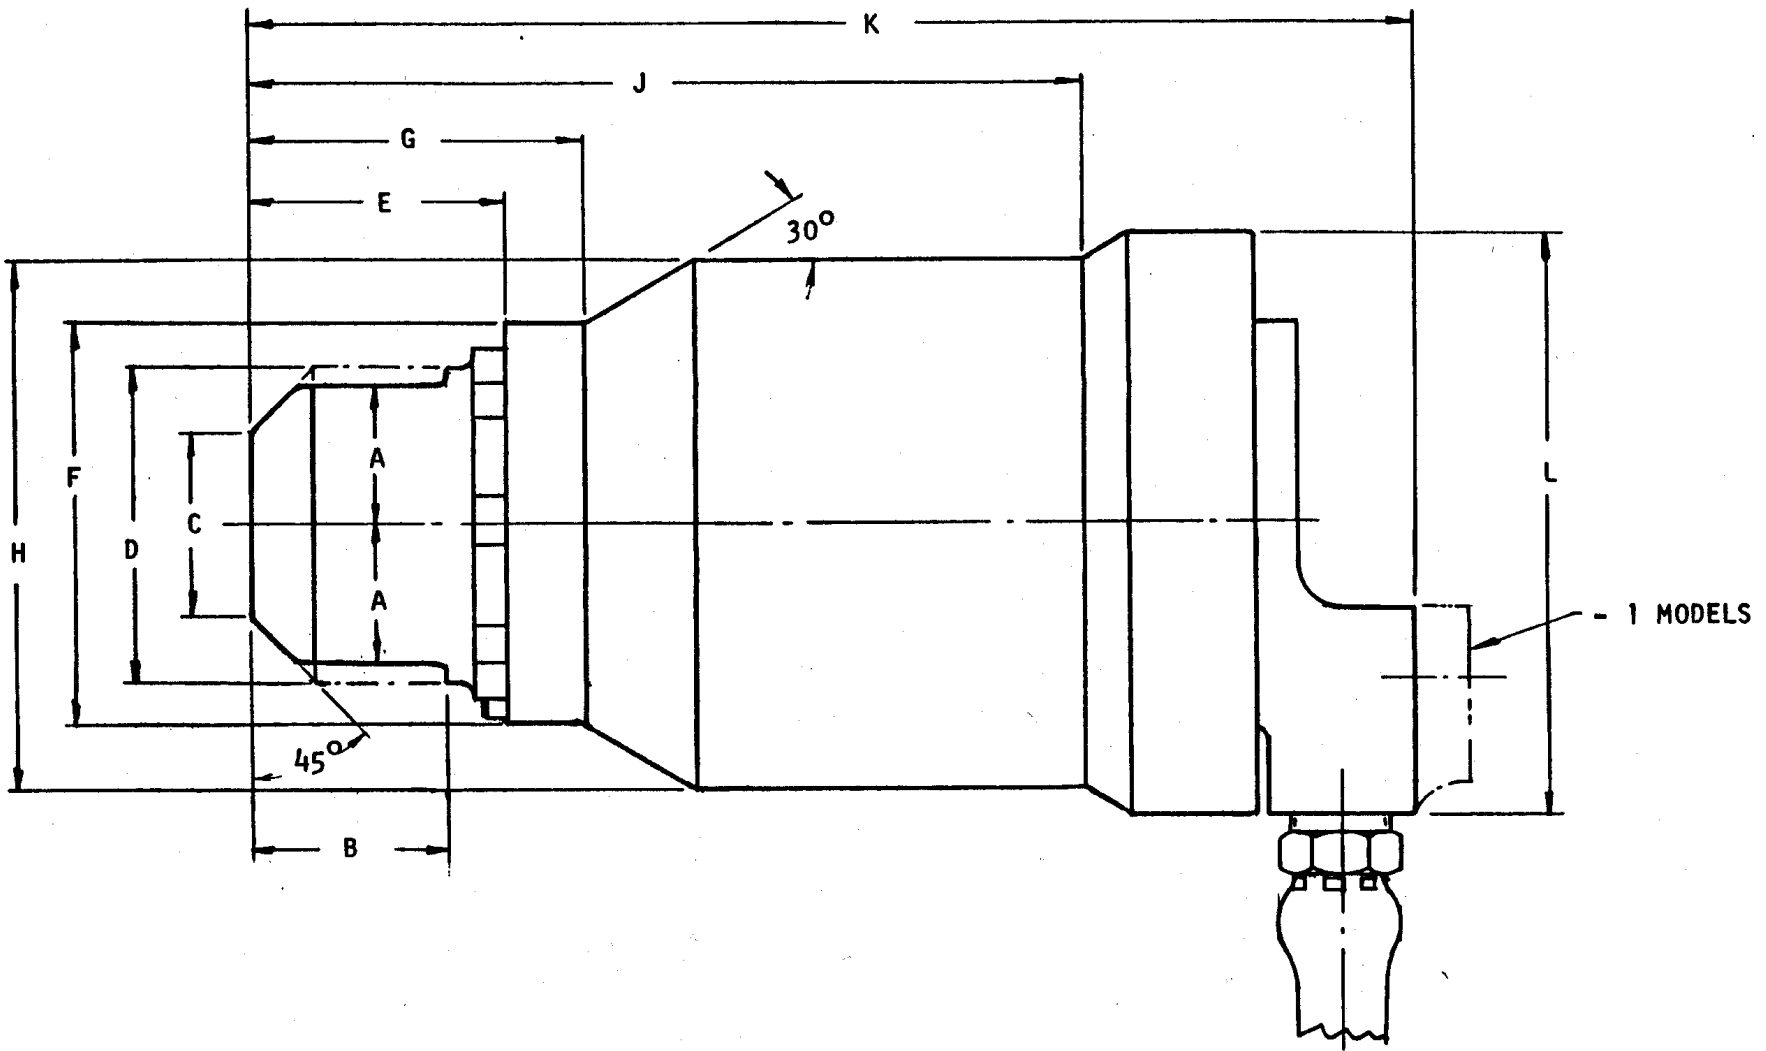

CLEARANCE DIMENSIONS

TOOL	A	B	C	D	E	F	G	H	J	K	L
6042	.93	1.32	1.24	2.12	1.74	2.87	2.37	3.68	5.63	7.87	4.03
6042-1											
7042	1.09	1.56	1.50	2.40	1.91	3.15	2.59	4.13	5.92	8.21	4.43
7042-1											